


## 14K 4-POST

MODEL # 4P14XFX & 4P14EFX

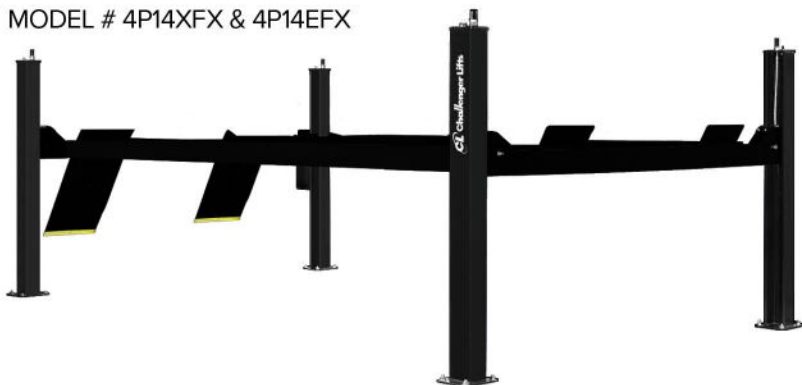

Challenger's 14,000 lb. closed-front drive-on 4-Post lift features a low approach angle and wide runways for a straightforward approach. We designed the 4P14 for dependability with louvered approach ramps that provide traction even in wet conditions.

Choose between two lengths, standard or extended, and a range of optional accessories like rolling jacks or our bolt-on alignment kit.

### 4P14 SPECIFICATIONS

Model Number	Standard Length 4P14EFX	Extended Length 4P14XFX
Rise Height	6' 6"	
Overall Length	20' 5¾"	22' 9¼"
Overall Width	10' 10¾"	
Inside Columns	9' 8"	
Between Columns	16' 4"	18' 7½"
Height of Columns	7' 6½"	
Width of Runways	20"	
Height of Runways	7¼"	
Width Between Runways	40" / 43"	
Air Supply Req.	90-120 psi	
Motor/Voltage	2HP, 208v-230v, 60Hz, 1Ph	
Rise Time	75s	
Min. Bay Size	12' x 24'	12' x 26'

### ROLLING JACKS ACCESSORIES

Part Number	Description
10333-RJ	Sprinter® Adapter Kit
10355-6	Pair of 6" stack extensions.
10355-9	Pair of 9" stack extensions.

### LIFT RAMPS

Part Number	Description	Length
10266	Louvered Ramp Kit	36"
10266L	Extended or Low Profile Ramp Kit	52"

### ROLLING JACKS & ALIGNMENT KITS

Part Number	Description
RJ7.5	Air/hydraulic operated rolling jack - adjustable width, 7,500 lbs. capacity.
40230-E	Optional airline kit for 4P14EFX
40230-X	Optional airline kit for 4P14XFX
40200-3D	Bolt-on alignment kit without turn plates - 3D alignment compatible
40200-3DBK	Bolt-on alignment kit with black powder coated turn plates - 3D alignment compatible
40200-3DSS	Bolt-on alignment kit with stainless steel turn plates - 3D alignment compatible

