

# CLFP9

With a 9,000 lb. capacity and 10' 7/8" overall column height, Challenger's CLFP9 2-post lift is ideal for low ceiling applications. Standard 3-stage front and 3-stage rear arms offer maximum sweep, arm retraction and reach.

An open-top design allow the CLFP9 to accommodate any vehicle height, making it a great addition to the home enthusiast garage as well as professional vehicle service shops. Other features include double-telescoping screw footpads to accommodate a wide range of lift points, a powder coated finish for maximum durability, plated arm pins and a heavy-duty chain and hydraulic lifting system with cable synchronization.

## STANDARD TRUE 3-STAGE FRONT AND REAR ARMS

Each of the three expansion phases is constructed of solid steel to ensure maximum rigidity, durability and technician security.



**CLFP9**  
9,000 LB. CAPACITY

10' 0.875"  
**IDEAL FOR  
LOW-CEILING  
APPLICATIONS**

**CL Challenger Lifts**

WWW.CHALLENGERLIFTS.COM

## FEATURES & BENEFITS

- » 9,000 lb. lifting capacity
- » 10' 7/8" overall column height is ideal for servicing vehicles in a low ceiling height
- » Open top design accommodates any vehicle height
- » 3-stage front and 3-stage rear arms accommodate a wide range of common cars, trucks, vans as well as SUVs within the same service bay
- » Electric/hydraulic heavy-duty chain lifting operation with cable equalization to reduce ceiling height requirement
- » Dual-point mechanical pull-lock cable release system
- » Fully gusseted base plate design increases column rigidity
- » Premium double telescoping screw pads adjust to multiple heights minimizing the need for adapters
- » Powder coat finish provides long-lasting durability
- » Plated arm restraints and arm pins inhibit rust and provide long-lasting durability
- » Standard dual integrated rubber door guards help protect vehicle panels from inadvertent damage

MODEL NUMBER	CLFP9
Lifting Capacity*	9,000 lb. (4082kg)
Lifting Configuration	Symmetric
Arms	3-stage front/3-stage rear
<b>A</b>	Rise Height <sup>1</sup>
<b>B</b>	Column Height
<b>C</b>	Overall Width
<b>D</b>	Drive-thru Clearance
<b>E</b>	Front Arm Reach
<b>F</b>	Rear Arm Reach
<b>G</b>	Screw Pad Height <sup>2</sup>
<b>H</b>	Inside of Columns
	Ceiling Height Required
	Motor
	Voltage
	Speed of Rise

\*Lift capacity ratings are based on loads equally distributed on all four arms.

<sup>1</sup> Rise height measured with telescoping screw pad in highest position

<sup>2</sup> Specifications are listed without rubber pad, for measurements with rubber pad add 1/4" (6mm).

## FEATURES



Heavy-duty chain lifting system with cable equalization




Double screw adjustable footpads

## OPTIONAL ACCESSORIES



Optional 3" and 6" stack adapter, and organizer rack

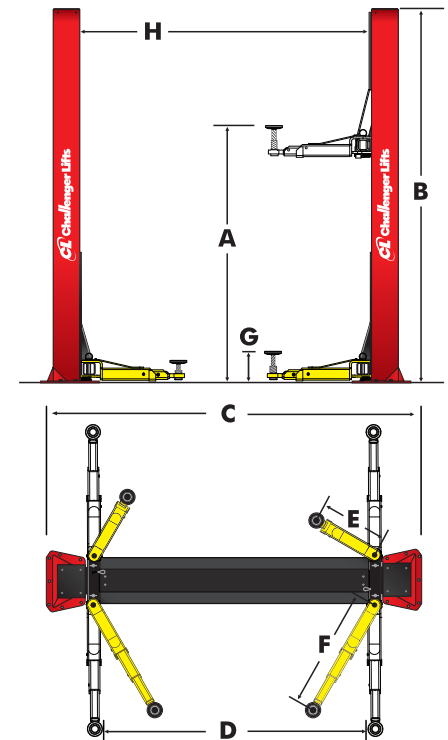

For more information, contact your Authorized Challenger Lifts Distributor:

