

TWO STAGE ELECTRIC 5 HP - 10 HP



Two Stage Electric Simplex

Model	Part No.	HP	Voltage/ Ph.	CFM @ 100psi	CFM @ 175psi	Tank (Gal.)	Max Pressure (PSI)	Ship Wt.* (Lbs)	Dimensions W x L x H
418V	8090253132	5	230/1	18	16	80V	175	580	37 x 24 x 72
438V	8090253140	5	230/3	18	16	80V	175	580	37 x 24 x 72
438V4	8090253157	5	460/3	18	16	80V	175	580	37 x 24 x 72
418VL	8090253165	7.5	230/1	23	21	80V	175	600	37 x 24 x 72
438VL	8090253173	7.5	230/3	23	21	80V	175	600	37 x 24 x 72
438VL4	8090253181	7.5	460/3	23	21	80V	175	600	37 x 24 x 72
6312H	8090253231	10	230/3	35	32	120H	175	830	73 x 24 x 49
6312H4	8090253249	10	460/3	35	32	120H	175	830	73 x 24 x 49
6312V	8090253215	10	230/3	35	32	120V	175	890	42 x 30 x 74
6312V4	8090253223	10	460/3	35	32	120V	175	890	42 x 30 x 74

Elite - These Units Include a Mounted/ Wired Magnetic Starter/Low Oil Switch & Auto Drain


418VE	8090253496	5	230/1	18	16	80V	175	590	37 x 24 x 72
438VE	8090253660	5	230/3	18	16	80V	175	590	37 x 24 x 72
438VE4	8090253678	5	460/3	18	16	80V	175	590	37 x 24 x 72
418VLE	8090253686	7.5	230/1	23	21	80V	175	610	37 x 24 x 72
438VLE	8090253694	7.5	230/3	23	21	80V	175	610	37 x 24 x 72
438VLE4	8090253702	7.5	460/3	23	21	80V	175	610	37 x 24 x 72
6312HE	8090253561	10	230/3	35	32	120H	175	840	73 x 24 x 49
6312HE4	8090253579	10	460/3	35	32	120H	175	840	73 x 24 x 49
6312VE	8090253546	10	230/3	35	32	120V	175	900	42 x 30 x 74
6312VE4	8090253553	10	460/3	35	32	120V	175	900	42 x 30 x 74

STANDARD FEATURES:

Magnetic Starter Controls
 Cast Iron Pump
 Concentric Ring Valves
 Finned Coolers
 ASME Tank and Safety Valves
 100% Factory Tested



6312H

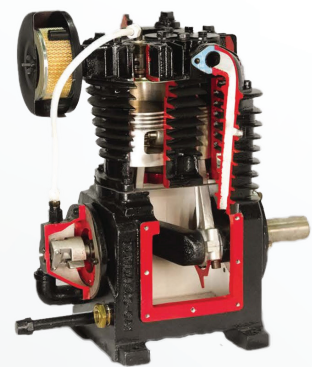

- Cast Iron Construction
- Automotive Style Rod Bearings and Wrist Pins
- Concentric Ring Valves
- Splashed Lubricated
- Finned Coolers

**2 FULL
YEAR
WARRANTY**

