

Available with SHOCKWAVE™



SP016 CARGO 2-Post Lift

SUPER DUTY SYMMETRIC LIFT
16,000 lbs. CAPACITY



**NEW SUPER DUTY SYMMETRIC LIFT WITH
WIDER DRIVE THRU FOR TRUCKS AND VANS**

*Setting the mark for reliability
and quality in heavy duty lifts.*



Model shown:
SP016U0A0BL / 16,000 lbs. capacity
SHOCKWAVE-EQUIPPED 2-post lift

LOW CEILING MODEL AVAILABLE

**SERVICE LONGER VAN WHEELBASES WITH EASE!
NEW SP016 CARGO LIFTS FEATURE
HEAVY DUTY 3-STAGE ARMS
WITH A GREATER
SPOTTING RANGE.**

*Shown with adjustable
thread up adapters*



74 13/16"
maximum reach

36 13/16"
minimum reach



The World's Most Trusted Lift™
www.rotarylif.com



SP016 CARGO 2-Post Lift

Model:



SP016 CARGO*
3-STAGE Arms
Truck Adapters

SHOCKWAVE Models

SP016 CARGO -SW

| | |
|---|--|
| Lifting Capacity | 16,000 lbs. (7257kg) |
| Max. Load (per arm) | 4,000 lbs. (1814kg) |
| Rise* | |
| A. Min.Truck Adapter Height | 76 29/32" (1953mm) |
| Max.Truck Adapter Height | 77 29/32" (1979mm) |
| Height Overall: | |
| B. Standard Adjustments | 15' to 16' 6" (4572-5029mm) |
| Low Ceiling (LC) | 13' 6" to 14' 6" (4115-4420mm) |
| Width Overall <small>(outside to outside of base plates)</small> | |
| C. Narrow | 12' 11" (3937mm) |
| Standard | 13' 5" (4089mm) |
| Wide | 13' 11" (4242mm) |
| Wide width setting provides greatest tire clearance for shorter wheelbases | |
| D. Narrow Drive-Thru Clearance | 105 11/32" (2677mm) |
| Standard Drive-Thru Clearance | 111 11/32" (2829mm) |
| Wide Drive-Thru Clearance | 117 11/32" (2981mm) |
| E. Floor To Overhead Switch | 15' 10 13/16" (4851mm) |
| F. Reach / Front Arm Min./Max. | 36 13/16" (935mm) / 74 13/16" (1900mm) |
| G. Reach / Rear Arm Min./Max. | 36 13/16" (935mm) / 74 13/16" (1900mm) |
| H. Min./Max. Truck Adapter Height* | 4 29/32" to 5 29/32" (125-150mm) |
| I. Min./Max. Low Step Height* WITH 5" ADAPTER EXTENSION | 9 29/32" to 10 29/32" (252-277mm) |
| J. Min./Max. High Step Height* WITH 10" ADAPTER EXTENSION | 14 29/32" to 15 29/32" (379-404mm) |
| Inside Columns | |
| K. Narrow | 120 15/32" (3061mm) |
| Standard | 126 15/32" (3213mm) |
| Wide | 132 15/32" (3366mm) |
| Motor / Voltage** | 4 HP / 208v-230v |
| With SHOCKWAVE | 5 HP / 110v |
| Time of Full Rise | 81 seconds at full capacity |
| With SHOCKWAVE*** | 60 seconds at full capacity 36 seconds at half capacity |
| Time of Descent | 20 seconds for all vehicle weights |
| Ceiling Height Required: Standard | 15' 2" to 16' 8" (4576-5080mm) |
| Low Ceiling (LC) | 13' 8" to 14' 8" (4166-4470mm) |
| Min. Bay Size | 15' x 30' (4572 x 9144mm) |
| Total Product Weight | 3,500 lbs. |

LIFT FEATURES

Multiple lift height options:

Standard: 15' to 16' 6" / Low ceiling: 13' 6" to 14' 6"

Three column width options: 12' 11" / 13' 5" / 13' 11"

- Air operated single point lock release
- Available with SHOCKWAVE™
- Rise height of over 75"
- 20 second lowering time - at any load
- Locking system engages every 4"
- Thread up adapters for easy contact
- Four (4) 5" adapter extensions and two (2) 10" extensions for added lifting height and reach
- Original "Double S" column design
- ALI Gold Certified


Clip-on rubber pads for adapters to spot unibody passenger cars. Set of four (4) standard.



Ultra-strong 10" (2 each) and 5" (4 each) stackable adapter extensions are included.



Model: SP016 CARGO

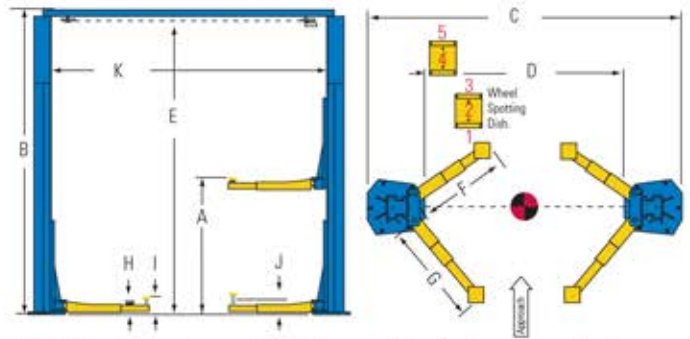

***NOTE:** Level bay floors provide the best underbody clearance needed to accommodate the broadest range of vehicles to spot and lift. Wide setting installations create the best tire clearance on shorter wheelbases. Vehicle axle weight **MUST NOT EXCEED** one half of total lift capability. Maximum arm load is 1/4 of lift rated capacity. SP016 Cargo lifts are designed for most class 4 and 5 vehicles. Some vehicles within each class may exceed arm capacity but not the lift capacity. Please consult vehicle axle information and lift manual for more information.

* Rise is measured from floor to adapter pick up area in lowest and highest position

** Optional DC SHOCKWAVE battery power available

*** Actual rise times may vary depending on vehicle weight

* Adapter heights measure floor to adapter pick up area in lowest and highest adapter positions.

Included are 5" and 10" extension measurements.

Standard color of lifts are blue and red unless otherwise noted. Gray and black are available at no additional charge.

Additional colors are available, consult your Rotary® representative for details.

RAL5005 RAL3002 RAL7040 RAL9005



Rotary Lift

2700 Lanier Drive
Madison, IN 47250, USA

