




# SRM10

## SITE SPECIFICATIONS

- **BAY HEIGHT:** 10' minimum
- **BAY WIDTH:** 12' recommended
- **BAY DEPTH:** 24' recommended
- **POWER REQ.:** 1HP, 115v Single Phase\*, 20-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days

## SERVICE BAY LAYOUT

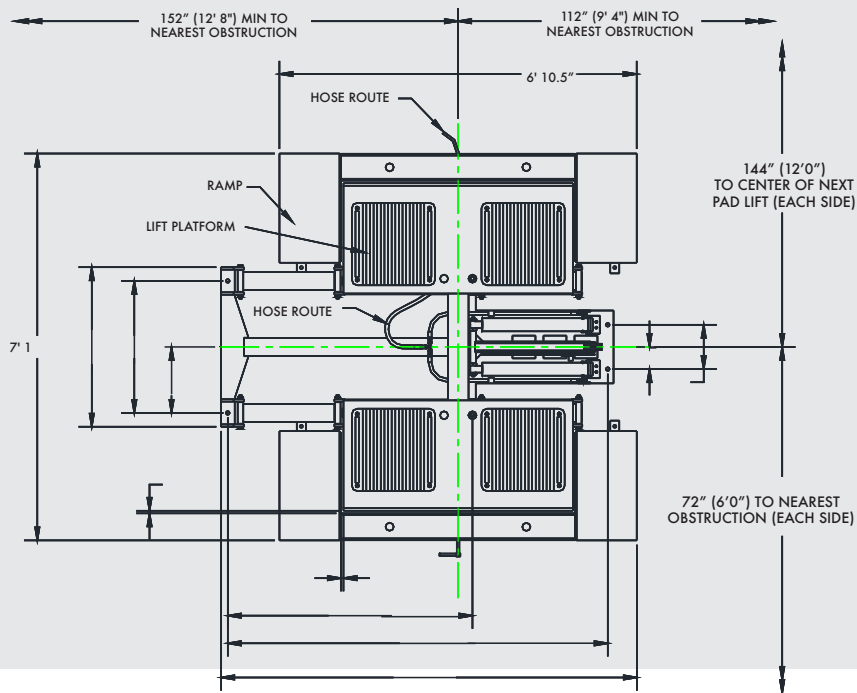

Model Number	SRM10
Lifting Capacity	10,000 lbs.
Raised Height	22"
Lowered Height	4.25"
Overall Width	85" (+ 2.5" for handle)
Locking Bar Heights	13.75" / 18.325" / 21.25"
Low Adapter Position	4.75"
High Adapter Position	6.75"
Outside Width of Platforms	72"
Width Between Platforms	23"
Platform Overall Length	50"
Ramp & Platform Overall Length	82.5"
Rearward Movement	13.25"
Motor/Voltage	1HP, 115v, 60Hz, 1Ph
ALI/ETL Certified	√
Colors Available	

\*3-phase upgrade is available for purchase

www.challengerlifts.com  
1-800-648-5438